



MANDELL ENVIRONMENTAL CONSULTING

409 MINNISINK ROAD • SUITE 102 • TOTOWA, NJ 07512 • (973) 785-7574 • FAX (973) 785-0561

Limited Water Sampling Report

Project Name: The Leaguers Head Start

Project Location: 301-310 16th Avenue, Newark, NJ

Date of Sampling: December 17, 2024

Limited water sampling was performed by Mandell Environmental Consulting at The Leaguers Head Start, 301-310 16th Avenue, Newark, NJ. Water samples were collected from the kitchen sink faucet and water coolers used by the child care center. Samples were also collected from 50% of the other indoor water faucets utilized by the child care. The samples were collected prior to water being used in the building for a minimum of 8 hours and not longer than 48 hours. The samples were collected in 250 milliliter (ml) containers accordance with New Jersey Regulations

The samples collected were submitted for analysis to Pace Analytical, 575 Broad Hollow Road, Melville, NY 11747, certification # NY158. Samples were analyzed by Graphite Furnace AA, EPA 200.9. The following table contains the results of the sampling. The maximum contaminant level (MCL) for lead in drinking water is 15 ug/L and copper 1,300 ug/L. (Laboratory Results and sampling forms Attached).

Sample Date 12/17/2024

Sample Number	Source	Results Lead	Results Copper	Units	Pos/Neg
L-1	Outlet 1	<1.0	5.4	Ug/L	Neg.
L-2	Outlet 3	<1.0	5.2	ug/L	Neg.
L-3	Outlet 4	<1.0	6.7	ug/L	Neg.
L-4	Outlet 6	<1.0	7.5	ug/L	Neg.
L-5	Outlet 9	<1.0	5.4	ug/L	Neg.
L-6	Outlet 12	<1.0	9.8	ug/L	Neg.
L-7	Outlet 11	<1.0	11.6	ug/L	Neg.
L-8	Outlet 15	<1.0	6.9	ug/L	Neg.
L-9	Kitchen Sink	<1.0	5.7	ug/L	Neg.
L-10	Water Cooler	<1.0	<2.0	ug/L	Neg.

The laboratory results show that none of the samples were found to exceed the lead in drinking water action level of 15 ug/L and copper 1,300 ug/L. Sampling forms and diagram are attached.

Sampling Performed by: Cheo Green
NJ Lead Inspector/Risk Assessor
Mandell Environmental Consulting
409 Minnisink Road, Suite 102
Totowa, NJ 07512

Signed: Cheo Green Date: 12-30-2024



Pace Analytical Services, LLC
575 Broad Hollow Road
Melville, NY 11747
516-370-6000

December 30, 2024

Stuart Casciano
Mandell Environmental Consulting
409 Minnisink Road
Suite 102
Totowa, NJ 07512

RE: Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Dear Stuart Casciano:

Enclosed are the analytical results for sample(s) received by the laboratory on December 20, 2024. The results relate only to the samples included in this report. Results reported herein conform to the applicable TNI/NELAC Standards and the laboratory's Quality Manual, where applicable, unless otherwise noted in the body of the report.

The test results provided in this final report were generated by each of the following laboratories within the Pace Network:
• Pace Analytical Services - Melville

If you have any questions concerning this report, please feel free to contact me.

Sincerely,

A handwritten signature in cursive script that reads "Kimberley Mack".

Kimberley M. Mack
kimberley.mack@pacelabs.com
516-370-6052
Project Manager

Enclosures



REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



Pace Analytical Services, LLC
575 Broad Hollow Road
Melville, NY 11747
516-370-6000

CERTIFICATIONS

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Pace Analytical Services, LLC - Melville, NY

575 Broad Hollow Rd, Melville, NY 11747
Connecticut Certification #: PH-0435
Delaware Certification # NY 10478
Maryland Certification #: 208
Massachusetts Certification #: M-NY026
New Hampshire Certification #: 2987

New Jersey Certification #: NY158
New York Certification #: 10478 Primary Accrediting Body
Pennsylvania Certification #: 68-00350
Rhode Island Certification #: LAO00340
Texas Certification #: T104704582
Florida Certification #: E871198

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



ANALYTICAL RESULTS

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Sample: L-1 OUTLET 1		Lab ID: 70329093001	Collected: 12/17/24 07:00	Received: 12/20/24 07:00	Matrix: Drinking Water			
Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
200.8 MET ICPMS Drinking Water		Analytical Method: EPA 200.8 Pace Analytical Services - Melville						
Copper	5.4	ug/L	2.0	1		12/26/24 19:02	7440-50-8	
Lead	<1.0	ug/L	1.0	1		12/26/24 19:02	7439-92-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



ANALYTICAL RESULTS

Project: THE LEAGUERS HEAD START12/17

Pace Project No.: 70329093

Sample: L-2 OUTLET 3		Lab ID: 70329093002	Collected: 12/17/24 07:02	Received: 12/20/24 07:00	Matrix: Drinking Water			
Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
200.8 MET ICPMS Drinking Water		Analytical Method: EPA 200.8 Pace Analytical Services - Melville						
Copper	5.2	ug/L	2.0	1		12/26/24 19:03	7440-50-8	
Lead	<1.0	ug/L	1.0	1		12/26/24 19:03	7439-92-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



ANALYTICAL RESULTS

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Sample: L-3 OUTLET 4		Lab ID: 70329093003	Collected: 12/17/24 07:03	Received: 12/20/24 07:00	Matrix: Drinking Water			
Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
200.8 MET ICPMS Drinking Water		Analytical Method: EPA 200.8 Pace Analytical Services - Melville						
Copper	6.7	ug/L	2.0	1		12/26/24 19:05	7440-50-8	
Lead	<1.0	ug/L	1.0	1		12/26/24 19:05	7439-92-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



ANALYTICAL RESULTS

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Sample: L-4 OUTLET 6		Lab ID: 70329093004	Collected: 12/17/24 07:05	Received: 12/20/24 07:00	Matrix: Drinking Water			
Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
200.8 MET ICPMS Drinking Water		Analytical Method: EPA 200.8 Pace Analytical Services - Melville						
Copper	7.5	ug/L	2.0	1		12/26/24 19:06	7440-50-8	
Lead	<1.0	ug/L	1.0	1		12/26/24 19:06	7439-92-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



ANALYTICAL RESULTS

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Sample: L-5 OUTLET 9		Lab ID: 70329093005	Collected: 12/17/24 07:07	Received: 12/20/24 07:00	Matrix: Drinking Water			
Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
200.8 MET ICPMS Drinking Water		Analytical Method: EPA 200.8 Pace Analytical Services - Melville						
Copper	5.4	ug/L	2.0	1		12/26/24 19:08	7440-50-8	
Lead	<1.0	ug/L	1.0	1		12/26/24 19:08	7439-92-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



ANALYTICAL RESULTS

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Sample: L-6 OUTLET 12		Lab ID: 70329093006	Collected: 12/17/24 07:10	Received: 12/20/24 07:00	Matrix: Drinking Water			
Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
200.8 MET ICPMS Drinking Water		Analytical Method: EPA 200.8 Pace Analytical Services - Melville						
Copper	9.8	ug/L	2.0	1		12/26/24 19:09	7440-50-8	
Lead	<1.0	ug/L	1.0	1		12/26/24 19:09	7439-92-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



ANALYTICAL RESULTS

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Sample: L-7 OUTLET 11		Lab ID: 70329093007	Collected: 12/17/24 07:11	Received: 12/20/24 07:00	Matrix: Drinking Water			
Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
200.8 MET ICPMS Drinking Water		Analytical Method: EPA 200.8 Pace Analytical Services - Melville						
Copper	11.6	ug/L	2.0	1		12/26/24 19:11	7440-50-8	
Lead	<1.0	ug/L	1.0	1		12/26/24 19:11	7439-92-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



ANALYTICAL RESULTS

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Sample: L-8 OUTLET 15		Lab ID: 70329093008	Collected: 12/17/24 07:14		Received: 12/20/24 07:00		Matrix: Drinking Water	
Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
200.8 MET ICPMS Drinking Water		Analytical Method: EPA 200.8 Pace Analytical Services - Melville						
Copper	6.9	ug/L	2.0	1		12/26/24 19:12	7440-50-8	
Lead	<1.0	ug/L	1.0	1		12/26/24 19:12	7439-92-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



ANALYTICAL RESULTS

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Sample: L-9 KITCHEN SINK		Lab ID: 70329093009	Collected: 12/17/24 07:15	Received: 12/20/24 07:00	Matrix: Drinking Water			
Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
200.8 MET ICPMS Drinking Water		Analytical Method: EPA 200.8 Pace Analytical Services - Melville						
Copper	5.7	ug/L	2.0	1		12/26/24 19:14	7440-50-8	
Lead	<1.0	ug/L	1.0	1		12/26/24 19:14	7439-92-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



ANALYTICAL RESULTS

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Sample: L-10 WATER COOLOR		Lab ID: 70329093010	Collected: 12/17/24 07:16	Received: 12/20/24 07:00	Matrix: Drinking Water			
Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
200.8 MET ICPMS Drinking Water		Analytical Method: EPA 200.8 Pace Analytical Services - Melville						
Copper	<2.0	ug/L	2.0	1		12/26/24 19:15	7440-50-8	
Lead	<1.0	ug/L	1.0	1		12/26/24 19:15	7439-92-1	

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



QUALITY CONTROL DATA

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

QC Batch: 377221 Analysis Method: EPA 200.8
QC Batch Method: EPA 200.8 Analysis Description: 200.8 MET No Prep Drinking Water
Laboratory: Pace Analytical Services - Melville
Associated Lab Samples: 70329093001, 70329093002, 70329093003, 70329093004, 70329093005, 70329093006, 70329093007, 70329093008, 70329093009, 70329093010

METHOD BLANK: 1977619 Matrix: Water
Associated Lab Samples: 70329093001, 70329093002, 70329093003, 70329093004, 70329093005, 70329093006, 70329093007, 70329093008, 70329093009, 70329093010

Parameter	Units	Blank Result	Reporting Limit	Analyzed	Qualifiers
Copper	ug/L	<2.0	2.0	12/26/24 18:42	
Lead	ug/L	<1.0	1.0	12/26/24 18:42	

LABORATORY CONTROL SAMPLE: 1977620

Parameter	Units	Spike Conc.	LCS Result	LCS % Rec	% Rec Limits	Qualifiers
Copper	ug/L	50	51.0	102	85-115	
Lead	ug/L	50	50.5	101	85-115	

MATRIX SPIKE SAMPLE: 1977622

Parameter	Units	70329100001 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Copper	ug/L	30.0	50	84.7	109	70-130	
Lead	ug/L	1.8	50	51.4	99	70-130	

MATRIX SPIKE SAMPLE: 1977624

Parameter	Units	70329100002 Result	Spike Conc.	MS Result	MS % Rec	% Rec Limits	Qualifiers
Copper	ug/L	22.9	50	80.7	116	70-130	
Lead	ug/L	1.5	50	56.9	111	70-130	

SAMPLE DUPLICATE: 1977621

Parameter	Units	70329100001 Result	Dup Result	RPD	Qualifiers
Copper	ug/L	30.0	29.9	0	
Lead	ug/L	1.8	1.8	1	

SAMPLE DUPLICATE: 1977623

Parameter	Units	70329100002 Result	Dup Result	RPD	Qualifiers
Copper	ug/L	22.9	22.8	0	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



QUALITY CONTROL DATA

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

SAMPLE DUPLICATE: 1977623

Parameter	Units	70329100002 Result	Dup Result	RPD	Qualifiers
Lead	ug/L	1.5	1.5	3	

Results presented on this page are in the units indicated by the "Units" column except where an alternate unit is presented to the right of the result.

REPORT OF LABORATORY ANALYSIS



QUALIFIERS

Project: THE LEAGUERS HEAD START12/17

Pace Project No.: 70329093

DEFINITIONS

DF - Dilution Factor, if reported, represents the factor applied to the reported data due to dilution of the sample aliquot.

ND - Not Detected at or above adjusted reporting limit.

TNTC - Too Numerous To Count

J - Estimated concentration above the adjusted method detection limit and below the adjusted reporting limit.

MDL - Adjusted Method Detection Limit.

PQL - Practical Quantitation Limit.

RL - Reporting Limit - The lowest concentration value that meets project requirements for quantitative data with known precision and bias for a specific analyte in a specific matrix.

S - Surrogate

1,2-Diphenylhydrazine decomposes to and cannot be separated from Azobenzene using Method 8270. The result for each analyte is a combined concentration.

Consistent with EPA guidelines, unrounded data are displayed and have been used to calculate % recovery and RPD values.

LCS(D) - Laboratory Control Sample (Duplicate)

MS(D) - Matrix Spike (Duplicate)

DUP - Sample Duplicate

RPD - Relative Percent Difference

NC - Not Calculable.

SG - Silica Gel - Clean-Up

U - Indicates the compound was analyzed for, but not detected.

N-Nitrosodiphenylamine decomposes and cannot be separated from Diphenylamine using Method 8270. The result reported for each analyte is a combined concentration.

Reported results are not rounded until the final step prior to reporting. Therefore, calculated parameters that are typically reported as "Total" may vary slightly from the sum of the reported component parameters.

Pace Analytical is TNI accredited. Contact your Pace PM for the current list of accredited analytes.

TNI - The NELAC Institute.

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.



QUALITY CONTROL DATA CROSS REFERENCE TABLE

Project: THE LEAGUERS HEAD START12/17
Pace Project No.: 70329093

Lab ID	Sample ID	QC Batch Method	QC Batch	Analytical Method	Analytical Batch
70329093001	L-1 OUTLET 1	EPA 200.8	377221		
70329093002	L-2 OUTLET 3	EPA 200.8	377221		
70329093003	L-3 OUTLET 4	EPA 200.8	377221		
70329093004	L-4 OUTLET 6	EPA 200.8	377221		
70329093005	L-5 OUTLET 9	EPA 200.8	377221		
70329093006	L-6 OUTLET 12	EPA 200.8	377221		
70329093007	L-7 OUTLET 11	EPA 200.8	377221		
70329093008	L-8 OUTLET 15	EPA 200.8	377221		
70329093009	L-9 KITCHEN SINK	EPA 200.8	377221		
70329093010	L-10 WATER COOLOR	EPA 200.8	377221		

REPORT OF LABORATORY ANALYSIS

This report shall not be reproduced, except in full,
without the written consent of Pace Analytical Services, LLC.

CHAIN-OF-CUSTODY / Analytical Request Document
The Chain-of-Custody is a LEGAL DOCUMENT. All personnel must follow the instructions on this document.

The Chain-of-Custody is a LEGAL DOCUMENT. All relevant fields must be completed accurately.

[illegible]

Effective Date:

Client Name:

Project

Courier: ☐ Fed Ex ☐ UPS ☐ USPS ☐ Client ☒ Commercial ☐ Pac ☐ Other

Tracking #:

Custody Seal on Cooler/Box Present: ☐ Yes ☒ No Seals intact: ☐ Yes ☒ No Temperature Blank Present: ☐ Yes ☒ No
Packing Material: ☐ Bubble Wrap ☐ Bubble Bags ☒ Ziplo ☐ Non ☐ Other Type of Ice: ☒ Wet ☐ Blue ☐ NoneThermometer Used: TH211 Correction Factor: 0.0 ☐ Samples on ice, cooling process has begunCooler Temperature(°C): 1.9 Cooler Temperature Corrected(°C): 1.9 Date/Time 5035A kits placed in freezer _____

Temp should be above freezing to 5.0°C

USDA Regulated Soil (☒ N/A, water sample)Did samples originate in a quarantine zone within the United States: AL, AR, CA, FL, GA, ID, LA, MS, NC, NM, NY, OK, OR, SC, TN, TX,
or VA (check map)? ☐ Yes ☐ NoDid samples originate from a foreign source including Hawaii and Puerto Rico)? ☐ Yes ☐ No

If Yes to either question, fill out a Regulated Soil Checklist (ENV-FRM-MELV-0076) and include with SCUR/COC paperwork.

Date and Initials of person examining contents:

12/20/24 PD

		COMMENTS:
Chain of Custody Present:	☒ Yes ☐ No	1.
Chain of Custody Filled Out:	☒ Yes ☐ No	2.
Chain of Custody Relinquished:	☒ Yes ☐ No	3.
Sampler Name & Signature on COC:	☒ Yes ☐ No ☐ N/A	4.
Samples Arrived within Hold Time:	☒ Yes ☐ No	5.
Short Hold Time Analysis (<72hr):	☐ Yes ☒ No	6.
Rush Turn Around Time Requested	☐ Yes ☒ No	7.
Sufficient Volume: (Triple volume provided for MS/MSD)	☒ Yes ☐ No	8.
Correct Containers Used:	☒ Yes ☐ No	9.
-Pace Containers Used:	☒ Yes ☐ No	10.
Containers Intact:	☒ Yes ☐ No	11.
Filtered volume received for Dissolved tests	☐ Yes ☐ No ☒ N/A	Note: if sediment is visible in the dissolved container.
Sample Labels match COC:	☒ Yes ☐ No	12.
-Includes date/time/ID/Analysis Matrix:	SL ☒ WT ☐ OIL ☐ OTHER	

Date and Initials of person checking preservation:

12/20/24 PD

All containers needing preservation have been	☒ Yes ☐ No ☐ N/A	13.	☐ HNO ₃ ☐ H ₂ SO ₄ ☐ NaOH ☐ HCl
pH paper Lot # <u>213624</u>		Sample #	
All containers needing preservation are found to be in compliance with method recommendation?	☒ Yes ☐ No ☐ N/A	Initial when completed:	Lot # of added preservative:
(HNO ₃ , H ₂ SO ₄ , HCl, NaOH>9 Sulfide, NAOH>12 Cyanide)		Date/Time preservative added:	
Exceptions: VOA, Coliform, TOC/DOC, Oil and Grease, DRO/8015 (water).		14.	
Per Method, VOA pH is checked after analysis		Positive for Res. Chlorine?	Y N
Samples checked for dechlorination:	☐ Yes ☐ No ☒ N/A	15.	
KI starch test strips Lot #		Positive for Sulfide?	Y N
Residual chlorine strips Lot #		16.	
SM 4500 CN samples checked for sul	☐ Yes ☐ No ☒ N/A	17.	
Lead Acetate Strips Lot #			
Headspace in ALK Bottle (>6mm):	☐ Yes ☐ No ☒ N/A		
Headspace in VOA Vials (>6mm):	☐ Yes ☐ No ☒ N/A		
Trip Blank Present:	☐ Yes ☐ No ☒ N/A		
Trip Blank Custody Seals Present	☐ Yes ☐ No ☒ N/A		

Client Notification/ Resolution:

Field Data Required?

Y / N

Person Contacted:

Date/Time:

Comments/ Resolution:

* PM (Project Manager) review (which includes the SCUR) is documented electronically in LIMS.

(Complete for each school)

FILES

Year School Constructed:

Date Completed:

- ILWF - INDOOR WATER PUMP
- WC - WATER COOLER
- FP - FOOD PREPARATION

- ¹
- Number outlets starting at the closest outlet to the Point of Entry (POE).

Attachment C - Drinking Water Outlet Inventory

(Complete for each school)

Name of School: THE LAGUARDS HEAD START Address: 301-310 16TH AVENUE NEWARK NJ

Grade Levels: _____ Year School Constructed: _____ Renovated/Additions: _____

Individual school project officer Name/Signature: _____

Date Completed: _____

#1	Type	Location	Code	Operational ² (Y/N)	Signs of Corrosion ³ (Y/N)	Filter ⁴ (Y/N)	Brass Fittings/ Faucets or Valves? (Y/N)	Aerator/ Screen (Y/N)	Motion Activated (Y/N)	Chiller (Y/N)	Water Cooler: Make Model	Co
1	IWF	Room 1		Y	N	N	N	Y	N	N		
2		"										
3		"										
4		OFFICE BUILDING										
5		DANIEL CLOS.										
6		KITCHEN										
7		Room 2										
8		" "										
9		" "										
10		Room 3										
11	✓	" "		✓	✓	✓	✓	✓	✓	✓		

IWF - INDOOR WATER FAUCET
WC - WATER COOLER
FP - FOOD PREPARATION

¹ Number outlets starting at the closest outlet to the Point of Entry (POE).

² Document if permanently or temporarily out of service on the Attachment B- Plumbing Profile.

³ Signs of corrosion detected, such as but not limited to frequent leaks, rust-colored water, or stained fixtures, dishes, or laundry.

⁴ Document on Attachment D- Filter Inventory.

Attachment D - Filter Inventory


(Complete for each school)

Name of School: THE LEAGUES HOODS Grade Levels: 5-8

Address: 301-310 16TH AVENUE, NEWARK NJ

Individual School Project Officer Signature: _____ Date: _____

[illegible]

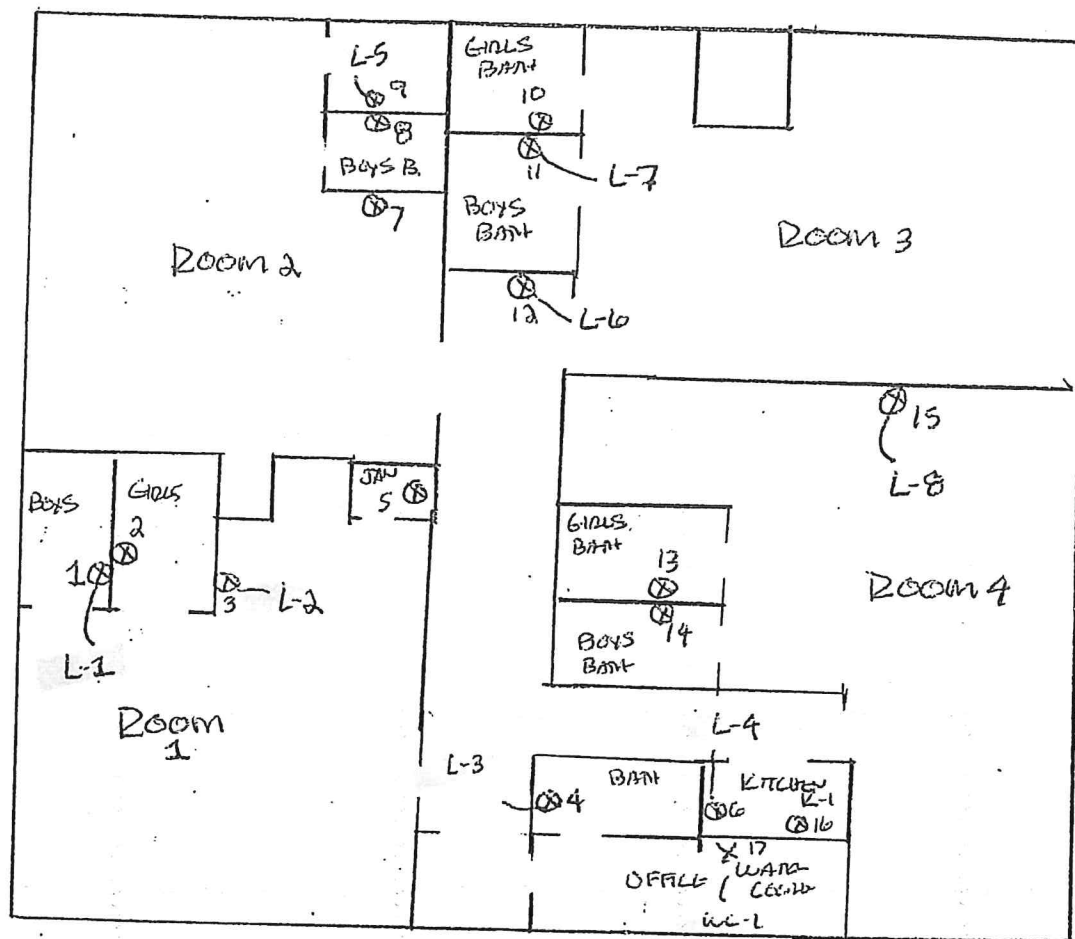

301-310 16TH AVE
NEWARK NJ

Mandell Lead Inspectors, Inc

dba

**MANDELL ENVIRONMENTAL
CONSULTING**

409 Minnisink Road, Suite 102, Totowa, NJ 07512
T: 973-785-7574 * F: 973-785-0561
mandelllead@verizon.net * www.mandellenvironmental.com